

STAINLESS STEEL FILTERED **GREASE TRAPS**

S W ▲ N
e n v i r o l t d

environmentally friendly
kitchen filtration systems

Protect your pipes and drains from blockage using the unique Freshmesh® filter system (*patent pending*).

High efficiency filter protection complies with all Water Authority standards to date.

Significant advantages in fitting, performance and cost over cast iron and other stainless steel alternatives.

Designed for quick inspection and easy cleaning when required.




THIS GUIDE COVERS

- ▲ Product specification
- ▲ Applications
- ▲ Technical reference information
- ▲ Model range and selection
- ▲ Installation and maintenance
- ▲ Contact details

Waste water containing solids, grease and fat can cause severe drainage problems. The unique Swan stainless steel filtered grease traps are designed to filter out solid waste efficiently, keeping drains cleaner. This prevents disruption of work due to blocked drains and ensures compliance with local Water Authority regulations.

Specifications

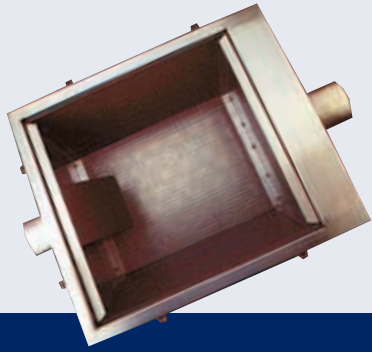

- ▲ Internal or external use (*above ground*).
- ▲ Through flow unit, so serves any sink volume if recommended installation and cleaning procedures are followed.
- ▲ High quality type 304 stainless steel.
- ▲ All seams fully welded.
- ▲ Connection using Multifit connectors.
- ▲ Quick release watertight lid for simple inspection and cleaning.
- ▲ Integrated access for grease reliquifier (*if specified*).
- ▲ Full maintenance instructions supplied with the unit for use by kitchen and works staff.
- ▲ 2 year return to base warranty.*

Applications

- ▲ **Commercial**
Bistro, Bakery, Cafe, Hotel, Nursing Home, Restaurant, Social Club, Takeaway, Works Canteen, etc.
- ▲ **Domestic**
B&B, Guest House
- ▲ **Industrial**
Factories, Food Packing, Food Processing, Industrial Units, Workshops

Benefits of Swan Stainless Steel Grease Traps over Cast Iron


- ▲ **Lightweight** - no jacks or trolleys required, easy carry up stairs.
- ▲ **Easy to fit** - no welding, uses standard fittings, fit in minutes by any qualified plumber.
- ▲ **Efficient** - complies with all current Water Authority regulations.
- ▲ **Easy to clean** - quick release clips, lift-out filter basket.
- ▲ **Lower Cost** - the best costs less.
- ▲ **Investment value** - easy to resite as you grow or if you move.
- ▲ **Next day UK mainland delivery**, 3 days Islands and Northern Ireland.

Benefits of Swan over Other Stainless Steel Grease Traps

- ▲ **Easy to fit** - Multifit connections.
- ▲ **No welding** - supplied ready to fit.
- ▲ **Adjustable mounting brackets** - on most models.
- ▲ **Efficient** - patent applied for Freshmesh® filtration system.
- ▲ **Easy to clean** - quick release lid for inspection and cleaning.

Range and Selection

Swan stainless steel filtered grease traps come in a range of sizes to suit all applications and work areas. When using the chart to determine the best model for you, choose the largest that will fit whilst leaving 100mm all round to allow for unclipping the lid. Please allow height **K** for removal of the filter cassette.

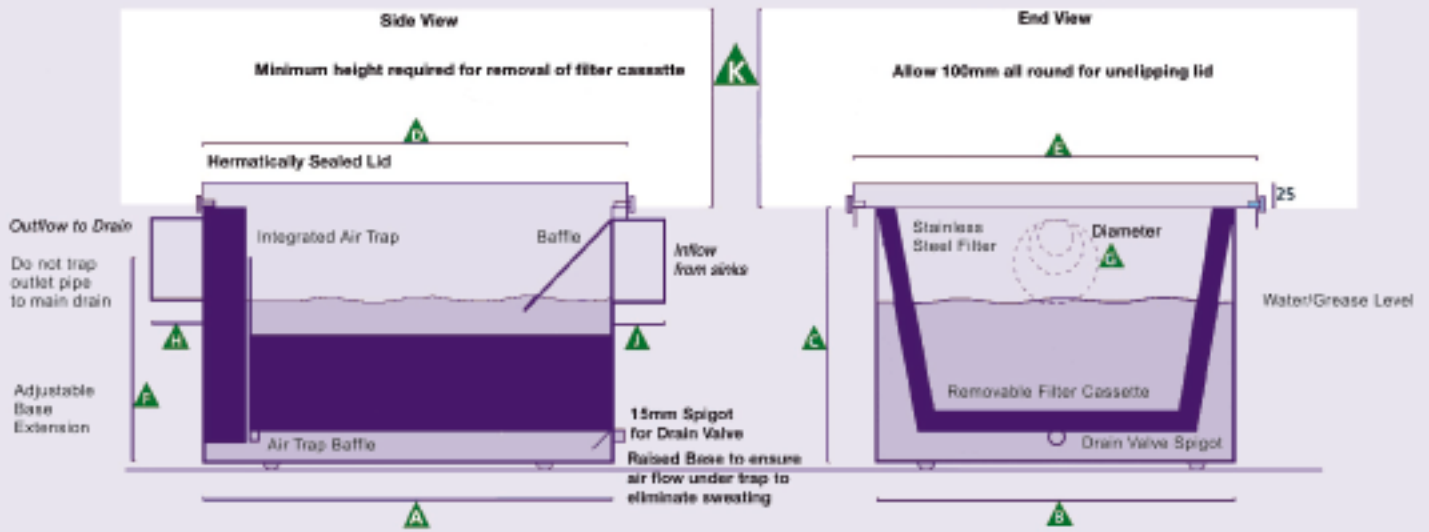

Model	Domestic kitchen	Dishwasher	Small kitchen 10-50 covers	Medium kitchen 50-100 covers	Large kitchen 100-150 covers	Very large 150+ covers	Takeaway
GT05	✓						
GT20	✓		✓				✓
GT40		✓	✓				✓
GT60		✓	✓	✓			✓
GT80		✓	✓	✓			✓
GT60M			✓	✓			✓
GT80M		✓	✓	✓			✓
GT120M		✓	✓	✓	✓	✓	
GT160M		✓		✓	✓	✓	
GT200M		✓		✓	✓	✓	

Model	Application	A	B	C	D	E	F	G	H	J	K	Weight
GT05	Domestic	225	150	150	225	150	120	40	35	35	150	6 kg
GT20	Single Sink	350	300	200	375	350	163-330	50	45	65	200	10 kg
GT40	Single Sink	500	400	200	525	450	163-330	50	45	65	200	16 kg
GT60	Single Sink	500	400	300	525	450	233-400	50	45	65	300	19 kg
GT80	Single Sink	500	400	400	525	450	333-500	50	45	65	400	22 kg
GT60M	Multi Sink	500	400	300	525	450	233-400	110	70	70	300	19 kg
GT80M	Multi Sink	500	400	400	525	450	333-500	110	70	70	400	22 kg
GT120M	Multi Sink	750	400	400	775	450	333	110	70	70	400	27 kg
GT160M	Multi Sink	1000	400	400	1025	450	333	110	70	70	400	33 kg
GT200M	Multi Sink	1200	400	400	1225	450	333	110	70	70	400	38 kg

Installation

Swan stainless steel filtered grease traps come fully assembled and ready to fit by a qualified plumber. If fitting into an existing system, check first that drain pipes on the outlet side have been cleaned. Set stainless steel brackets (*supplied*) to the required inlet/outlet height. Connect to inlet and outlet using standard Multifit connectors (*not supplied*). The low level 15mm pipe must be connected to the main drain with a shut off valve (*not supplied*). This will aid the deep cleaning operation. Once fitted, return the warranty card supplied with the unit to activate customer support.

Swan stainless steel filtered grease traps are designed to be compatible with the Swan GT series mains or battery operated dispensers for the timed injection of bio-active liquid into the grease traps. Please ask for details and installation instructions. (Adjustable mounting brackets not available on the GT05, GT120M, GT160M, GT200M Models)

STAINLESS STEEL FILTERED GREASE TRAPS

Contacts

Swan enviro stainless steel filtered grease traps and Swan GT series mains or battery operated dispensers are available through your local plumbers, drainage or builders merchant.

For technical information and sales support, please contact

**Swan enviro
Engine Road
Loanhead
Edinburgh
EH20 9RF**

Tel +44 (0)131 440 3812
Fax +44 (0)131 448 2119

*2 year return to base warranty.
If it's our fault, we'll fix it. We will replace a faulty unit by return on receipt of the grease trap and proof of purchase, subject to appropriate application, installation by a qualified plumber and proper maintenance. This excludes the neoprene lid seal.

Freshmesh® stainless steel filtered grease trap patent pending # 9519706.7

Swan enviro reserves the right to alter or improve the design of these units without notice.

E & OE.

S W ▲ N
e n v i r o l t d

**environmentally friendly
kitchen filtration systems**